



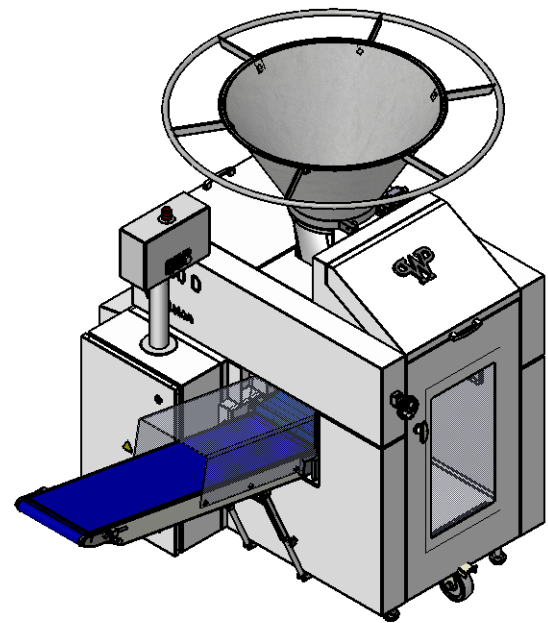




To be provided by customer:

Electrical connection
230/400V, 3pH, 50Hz

E: 1,8 KVA

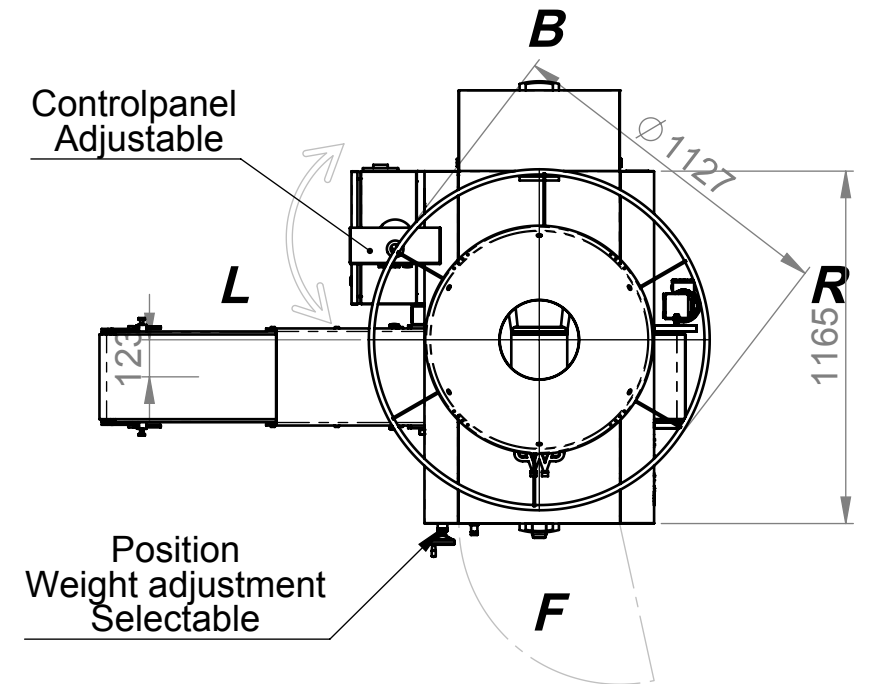

Inclination discharge conveyor:
-Single pocket max 25°
-Multipocket max 10°
(depending on dough consistency)

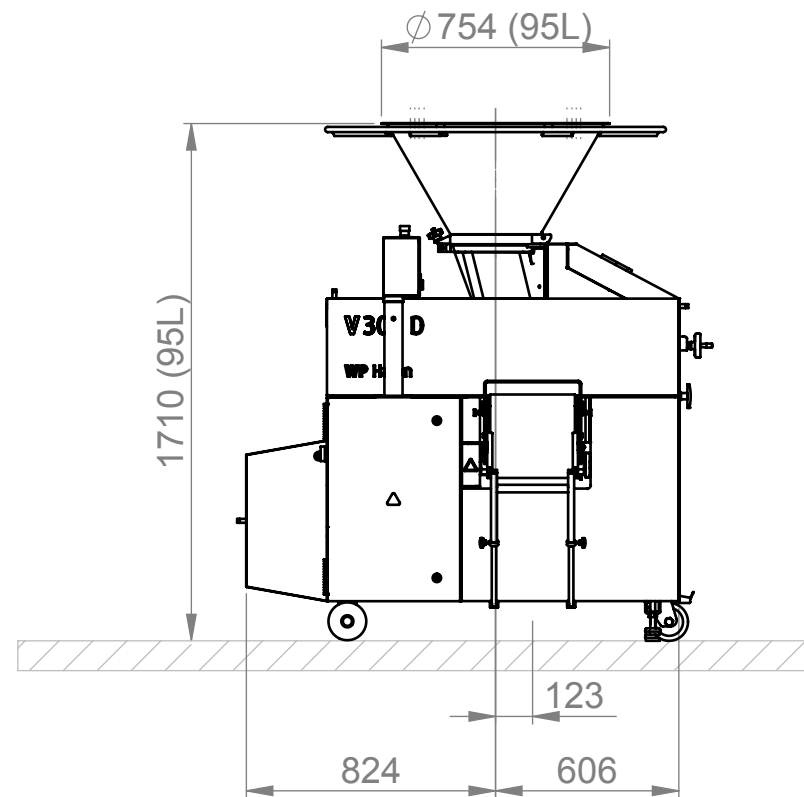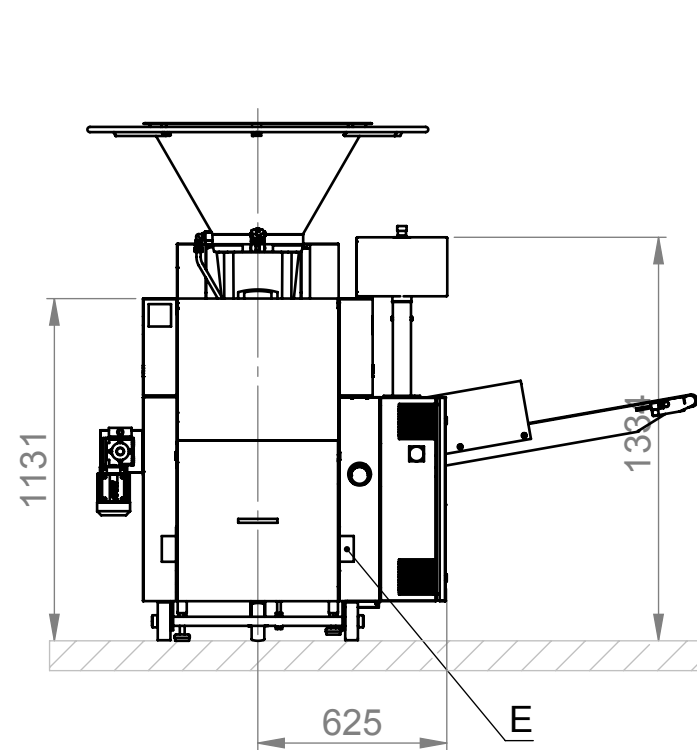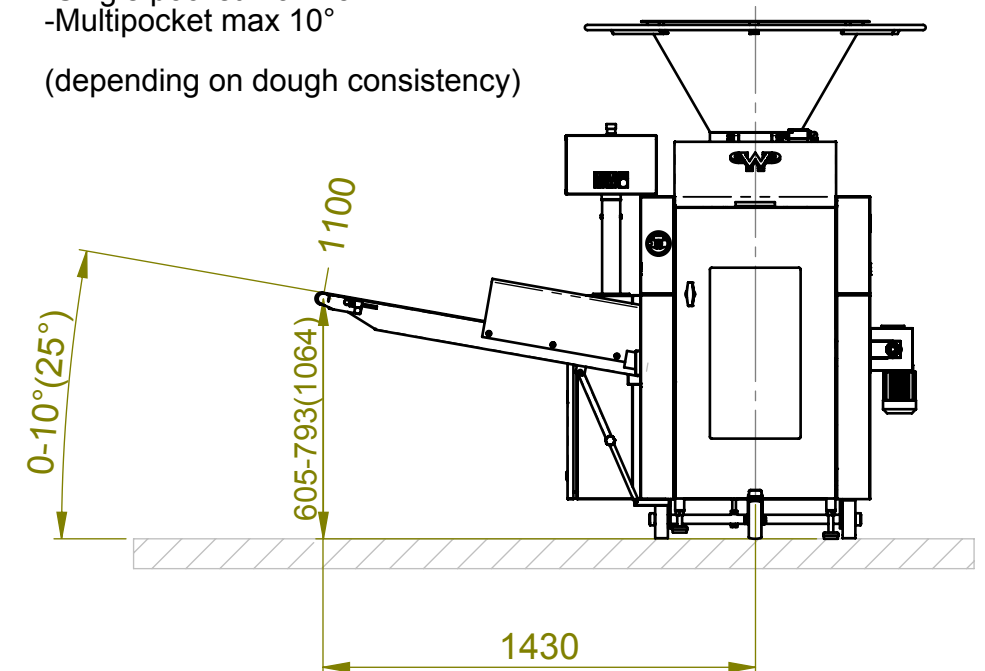

Conceptual drawings
for sales purposes only

Description:Pam-assy V300 D



Customer:

CreatedBy rpeeters
CreationDate 30-01-2012
LastModifiedBy rpeeters
LastModifiedDate 29-08-2013

ProjectAccountManager

No: HMB0000991

Revision:0

Order / Offerte

Projection



Scale 1:25

Sheet
1 / 1

RELEASED

A 3

THIS PRINT IS PROPERTY OF WP-HATON BV., SUBJECT TO RETURN ON DEMAND, AND IS LOANED WITH THE UNDERSTANDING THAT IT IS NOT TO BE USED, DIRECTLY OR INDIRECTLY, IN ANY WAY DETRIMENTAL TO THE INTERESTS OF WP-HATON BV.