

*think process!*



# FORMPROFI

Compact form baking system with  
integrated drum moulder

think process!

# FORMPROFI



## WP CLEANTEC

- Hygiene concept



## WP GREENENERGY

- Energy-efficient system operation




## WP SMARTCONTROL

- Easy operation



## WP BAKINGQUALITY

- Product-specific conditioning gentle on the dough

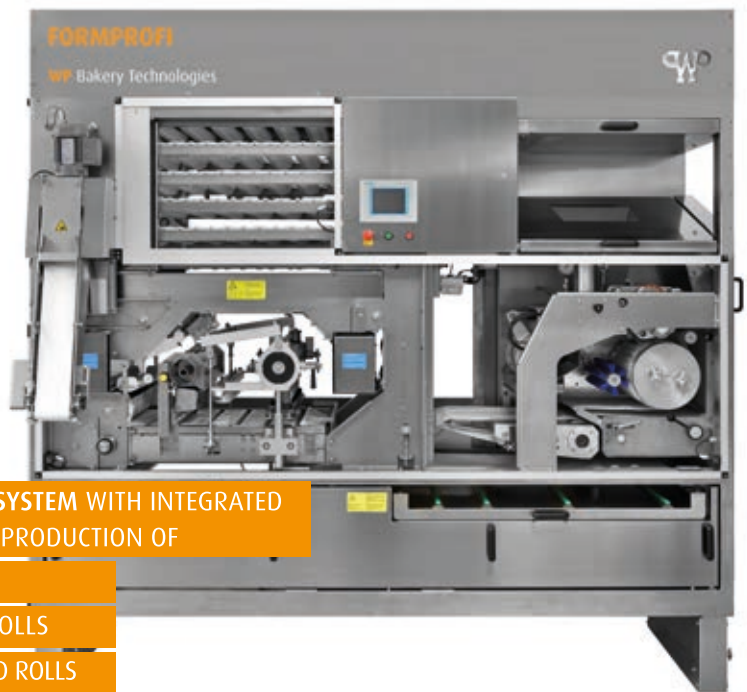

COMPACT FORM BAKING SYSTEM WITH INTEGRATED DRUM MOULDER FOR THE PRODUCTION OF

- ⊗ KAISER ROLLS
- SMOOTH ROUND ROLLS
- ⊕ AND OTHER FORMED ROLLS
- ∞ DOUBLE ROLLS

WITHIN A WEIGHT RANGE OF 40 TO 65/75 g  
(DEPENDENT ON THE STAMPING CUPS USED)

## BENEFITS

- Perfect craftsmanship quality
- Proven dividing principle of the Multimatic with integrated drum moulder
- Space-saving
- Product diversity thanks to revolver stamping head with room for 1 fixed Kaiser dough stamp and 3 additional freely selectable and interchangeable dough stamps
- Perfect alignment thanks to separate stamping cups
- Use of commercially available proofing boards thanks to the variable depositing unit
- Siemens S7 touch screen control
- Optimum hygiene concept
  - Stainless steel design
  - Intense degermination
  - Ribbons removable for cleaning







## SPECIFICATION

- 5-row system with 600 mm working width
- Integrated drum moulder with rotary valve
- Manual pressure adjustment
- Weight adjustment with motor
- Interchangeable moulding drum
- Adjustable moulding belt
- Revolver stamping head with 4 rows of tools max.
- Dough stamp for Kaiser rolls
- Pneumatically adjustable flour duster
- Ribbon drying
- Maintenance-free ribbon chain with automatic tensioning
- Variable depositing unit for proofing boards in 3 Euro sizes, 400 x 600 / 580 x 780 / 580 x 980
- Proofing board fixture as a drawer
- Intensive degermination station
- Operator side left
- Siemens S7 touch screen control



## OPTIONS

- Air conditioning
- Discharge belt at the side
- Exhaust air ventilator for correction of the proofing cabinet climate with continuous operation
- Depositing unit with end position change
- Proofing board fixture as push-in shelf
- Double-intensity degermination
- Laterally movable system variant
- Increased system height by 50 or 100 mm
- Collision protection on operator side
- Further chamber drums for variable weight ranges
- Stamping cups for different weight ranges
- Final proofing cabinet
- Stamping tools for
  - Star rolls
  - Button rolls
  - Rosette rolls
  - Pressed rolls
  - Kringel rolls
  - Kärntner rolls
  - Football rolls
  - Poppy seed rolls
  - Rhomb



## FORMPROFI

### TECHNICAL SPECIFICATION

Hourly capacity variable depending on the proofing time	pieces/hour	4,000
Dimensions L x W x H (Cladding parts may protrude beyond the basic dimensions by 100 mm)	mm	2,600 x 1,125 x 2,550
Minimum ceiling height	mm	2,600
Variable pre-proofing time	min.	12
Weight range	g	40 - 65 / 75 depending on the stamping cups used
Proofing board dimensions	mm	400 x 600 580 x 780 580 x 980
Pull-off length	mm	1,000
Connected loads		
Electrical – without air conditioning	kW	4.5
Electrical – with air conditioning	kW	7.5
Cold water connection	"	1/2
Water drain	Interior dia.	40
Compressed air	"	1/2 6 - 8 bar, min. 2 normal m <sup>3</sup> / h - condensate-free

**WERNER & PFLEIDERER LEBENSMITTELTECHNIK GMBH**

von-Raumer-Str. 8-18 // D-91550 Dinkelsbühl // Germany // Fon +49 9851-905-0 // Fax +49 9851-905-8342 //  
info@wp-l.de // www.wp-l.de // www.wpbakerygroup.com